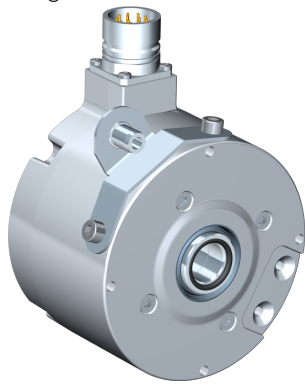


**X-heavy duty Hollow shaft encoder, Incremental**

- Performance hollow shaft encoder for heavy duty industries
- Hybrid bearings for extended lifetime
- High vibration and shock resistance
- Electrically insulated shaft; up to 2,5 kV

**Mechanical data**

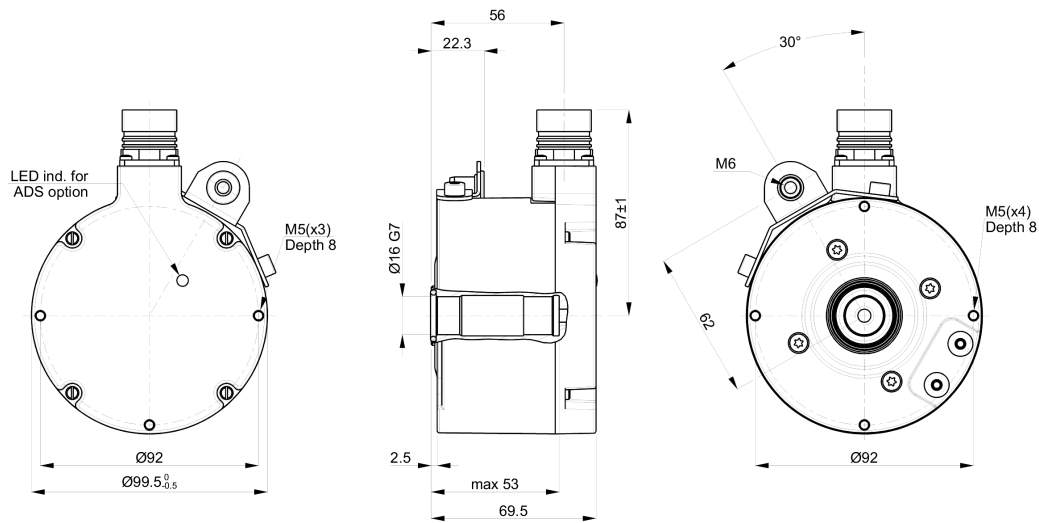
Operating temperature	-40 °C...+85 °C
Ingress protection class [IEC 60529]	IP67 (IP66 at shaft inlet)
Vibration [IEC 60068-2-64]	≤ 20 g, 55-2000 Hz
Shock [IEC 60068-2-27]	≤ 400 g, 3.5 ms
Shaft load max (axial/radial)	500 N / 1200 N
Rotational speed max	6000 rpm
Shaft material	Stainless steel with insulated hybrid bearings
Cover material	Aluminium (coated)
Weight	1300 g

Encoder configuration


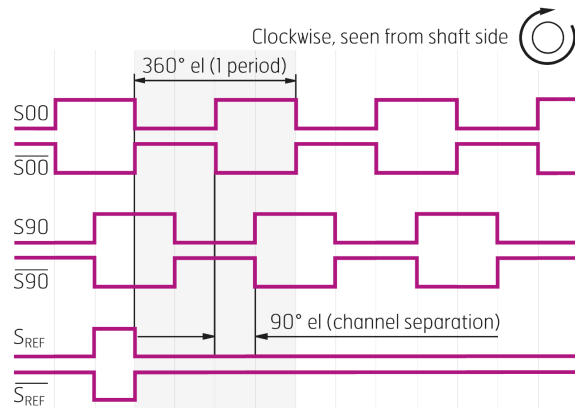
Code key	862228157
Type	XHI
Shaft type	Ø16 mm blind hollow shaft
Flange type	86-flange
Resolution	3072 ppr
Power supply	9-30 Vdc
Output signal	High Current HTL (HCHTL)
Connection type	M23 connector 12-pin
Pin layout	CW
Number of channels	6 (S00, S00\, S90, S90\, Sref, Sref\)
Advanced Diagnostic System	ADS Classic
Torque bracket	330° orientation

Electrical data

Polarity protected	Yes
Short circuit protected incremental outputs	Yes
Current consumption (No load)	60 mA at 24 Vdc (Max. 80 mA)
Incremental output load (max)	± 40 mA
Output frequency max	200 kHz
Cable length max	350 m at 100 kHz
Channel separation	90 °el ± 25 °el
Dividing error	± 50 °el
MTTFd value [Years]	417
PFHd value [h-1]	9,25E-07
ADS PC Communication	PC communication via RS-232 max 10 m

Dimensions**Pin Configuration**

Function	Pin
+E Volt	12
0 Volt	10
0 (Sref)	3
0 inverted (Sref\)	4
1 (S90)	8
1 inverted (S90\)	1
2 (S00)	5
2 inverted (S00\)	6
Alarm +	9
Alarm -	11
RXD	7
TXD	2

**Output signal****Order information**

Part number	768201-03
-------------	-----------